


Fitting Instructions #2664IS

Subaru WRX GC, GF and GM

Differential Support Bracket Mount Kit (Rear)

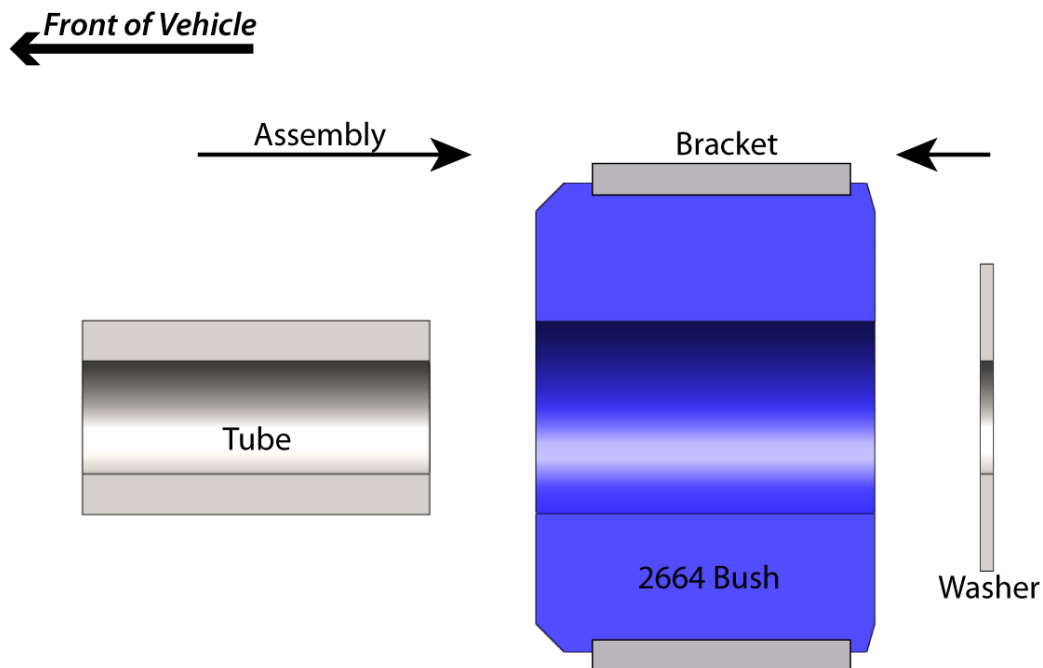

- With the vehicle on jack stands, remove the differential mount brackets. Refer to your workshop manual for detailed instructions of how to remove them from the vehicle;
- Remove the original bushes, including the shell, by using a hydraulic press or other suitable tool to push them out;
- Ensure that the grease supplied is used on all mating surfaces during assembly and install the bushes, as it is shown in the picture above.
- Apply the grease supplied to the bore of the bush and the steel crush tube. Push in the crush tube;
- Refit the brackets to the car;
- Ensure that all bolts are tightened to the manufactures specifications then proceed to have the vehicle wheel-aligned.

Note: Polyurethane bushings must be fitted to both sides of the vehicle. This kit should be installed by a Qualified Motor Mechanic.

